

## 功能 Features

高稳定性，保证严格的真空密封  
 高振动和抗冲击性能  
 优良的环保能力



## 技术参数 Electrical Specification

项目	Model	TH3*8	TH2*6
频率范围	Frequency Range	4.0 ~ 27MHz	6.0-32MHz
温度频差	Frequency Tolerance	±10 ppm, ±20 ppm, ±30 ppm	
工作温度范围	Operating Temp Range	-10 ℃~ +60 ℃, -20 ℃~ +70 ℃	
负载电容	Load Capacitance	10 pF ~ 32 pF	
激励功率	Drive Level	10uW ~ 100uW	
静电容	Shunt Capacitance	5 pF max	

## 等效阻抗 Equivalent Series Resistance(ESR)


### TH 3\*8

Frequenc MHz)	Oscillation Mode	
4.0 ~ 6.0	Fundamental	100
6.1 ~ 10.0	Fundamental	80
10.1 ~ 12.0	Fundamental	60
12.1 ~ 16.0	Fundamental	50
16.1 ~ 27.0	Fundamental	40

### TH 2\*6

Frequenc MHz)	Oscillation Mode	
6.0 ~ 32.0	Fundamental	60

## 外形尺寸 Dimensions

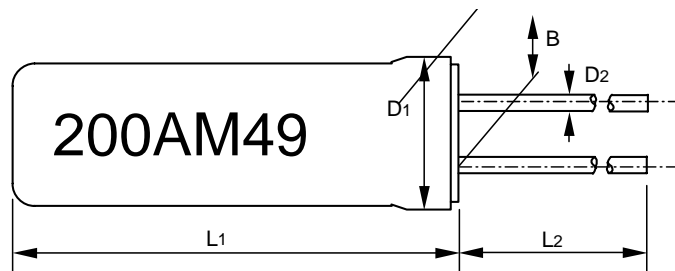

型号	L1	L2	D1	D2	B
TH3*8	8.0 Max.	9.5 Min.	φ 3.1 Max.	φ 0.3	1.1
TH2*6	6.0 Max.	9.5 Min.	φ 2.0 Max.	φ 0.3	1.1